

Válvulas



SUMINISTRALES
Global de Suministros Industriales S.A.S.
www.suministrales.com.co



VÁLVULAS BOLA TIPO FLOTANTE

ACERO CARBÓN - INOXIDABLE Y ALEACIONES.
CONSTRUCCIÓN SEGÚN API 608.

CLASE DIÁMETRO NOMINAL	150		300		600	
	L R.F.	PESO (Kg)	L R.F.	PESO (Kg)	L R.F.	PESO (Kg)
2"	7,00	11,0	8,50	15,0	11,50	20,0
2-1/2"	7,52	15,0	9,49	26,0		
3"	8,00	20,0	11,12	33,0	14,00	43,0
4"	9,00	31,0	12,00	54,0	17,00	85,0
5"	14,02	51,0	15,00	85,0		
6"	15,50	78,0	15,88	118,0		
8"	18,00	120,0	19,75	220,0		
10"	21,00	195,0	22,38	410,0		
12"	24,00	310,0	25,50	540,0		

VÁLVULAS BOLA TIPO TRUNNION


DE 3 PIEZAS EN ACERO CARBÓN - INOXIDABLE Y ALEACIONES. CONSTRUCCIÓN SEGÚN API 6D.

CLASE	150		300		600			900			1500			2500		
	L R.F.	PESO (Kg)	L R.F.	PESO (Kg)	L R.F.	L R.T.J.	PESO (Kg)	L R.F.	L R.T.J.	PESO (Kg)	L R.F.	L R.T.J.	PESO (Kg)	L R.F.	L R.T.J.	PESO (Kg)
2"	7,0	22	8,5	28	11,5	11,625	34	14,5	14,625	59	14,50	14,625	59	17,75	17,875	95
3"	8,0	34	11,13	47	14,0	14,125	66	15,0	15,125	85	18,50	18,625	115	22,75	23,000	210
4"	9,0	52	12,0	75	17,0	17,125	120	18,0	18,125	165	21,50	21,625	210	26,50	26,875	375
6"	15,5	160	15,88	205	22,0	22,125	275	24,0	24,125	385	27,75	28,000	490	36,00	36,500	835
8"	18,0	335	19,75	385	26,0	26,125	492	29,0	29,125	625	32,75	33,125	780	40,25	40,875	1.430
10"	21,0	425	22,38	530	31,0	31,125	745	33,0	33,125	950	39,00	39,125	1.560	50,00	50,875	2.520
12"	24,0	585	25,5	780	33,0	33,125	1.060	38,0	38,125	1.280	44,50	45,125	1.980	56,00	56,875	3.460
14"	27,0	805	30,0	1.025	35,0	35,125	1.250	40,5	40,875	1.625	49,50	50,250	2.780			
16"	30,0	1.070	33,0	1.415	39,0	39,125	1.680	44,5	44,875	1.995	54,50	55,375	3.890			
18"	34,0	1.370	36,0	1.685	43,0	43,125	2.180	48,0	48,500	2.920	60,50	61,375	5.380			
20"	36,0	1.830	39,0	2.140	47,0	47,250	2.780	52,0	52,500	3.560	65,50	66,375	6.240			
24"	42,0	2.980	45,0	3.420	55,0	55,375	4.835	61,0	61,750	5.560	80,50	81,500	7.380			
26"	45,0	3.650	49,0	4.340	57,0	57,500	5.830	65,0	66,000	7.620						
28"	49,0	4.380	53,0	4.990	61,0	61,500	6.380	69,0	69,875	8.450						
30"	51,0	5.280	55,0	5.890	65,0	65,500	7.450	74,0	74,875	10.850						
32"	54,0	6.225	60,0	7.525	70,0	70,625	8.325	80,0	80,875	11.830						
36"	60,0	8.720	68,0	9.460	82,0	82,625	11.460	90,0	91,125	16.250						
40"	69,0	11.730	77,0	12.710	92,0	92,000	15.550									
42"	73,0	12.970	82,0	14.110	96,0	96,000	18.175									
48"	84,0	18.170	85,44	19.890	100,0	100,000	25.350									

L Entre bridas R.F.
L Entre bridas R.T.J.
Peso en Kilogramos

Dimensión entre extremos "L" en pulgadas según ASME B16.10.
Diseño largo (Long Pattern)
Peso calculado aproximado. Difiere entre fabricantes
No incluye operador de engranaje.

Flotante

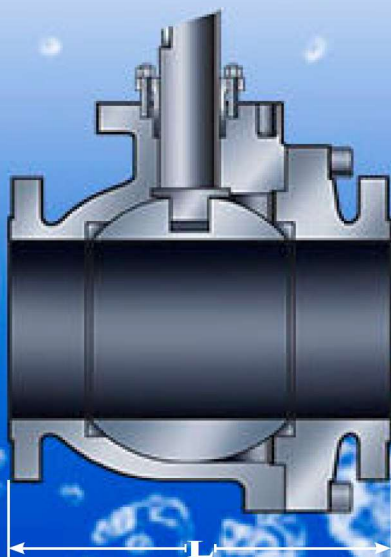

Trunnion

